

# JUNXING PPR PIPE & FITTING



## **Tianjin Junxing Pipe Group Co., Ltd.**

Address: No.1, Kaiyuan Road, Fuyuan Economic Development Area, Wuqing District, Tianjin, 301701China

Tel: 0086-22-84783371 / 0086-22-84783741

Fax: 0086-22-24559615

Email: [info@junxingpipe.com](mailto:info@junxingpipe.com)

Website: [www.junxingpipe.com](http://www.junxingpipe.com); [www.tjxgy.com](http://www.tjxgy.com)

**JUNXING PIPE FOR BETTER LIFE!**

# INTRODUCTION OF JUNXING

## JUNXING PIPE GROUP CO., LTD.

Junxing Pipe Group Co., Ltd is a complex high technology enterprise which integrates research and development of new products, manufacture of pipes and fittings, municipal and mechanical equipments, installation of petrochemical pipes and fountain lighting, import and export trade and marketing. Junxing is vice president of China Plastics Processing Industry Association, president of Shandong chamber of commerce in Tian Jin, vice president of Tianjin building materials association and plastic industry association. Junxing is one of the most famous pipe manufacturing enterprises in China; it plays a leading role in pipe industry in Tian Jin.

In 2009, Junxing was recognized as Famous Brand of China by State Administration for Industry and Commerce. In 2010, it came into being top 20 brands in plastic pipe industry.



Further more, Junxing obtains many honors, National Inspection-exemption Products, famous brand in Tian Jin, new and high-tech enterprise in Tian Jin, top 10 brands of floor heating pipes in China.

Junxing Pipe Group is located in Fu Yuan Economic Development Area in Wu Qing District, its registered capital is 3200million, processes production plant 76thousand square meters, over 200 sets of equipments for production, inspection and experiment. We produce more than 20 series of pipes and fittings made of PP-R, PB, PE, PE-RT, PE-X, HDPE, RDPAP, which are applied in water supply and drainage, heat supply and transportation of gas. Our company based on domestic market, and develop broad sales network all over the world.

## Valuable Supplier



## Valuable Partner



## ENTERPRISE CULTURE:

### Company aims:

Honesty and trustworthiness, good quality and customer satisfaction.

### Management philosophy:

Innovation of management, technology and products.

### Strategic objectives:

Constant pursuits, innovative development.



## Rich products range & Flexibility

Junxing has powerful manufacture capacity, owns advanced manufacturing equipments and techniques, automatic production control system, and excellent test methods and equipments, all these make it possible to provide high-quality pipes and fittings.



# PPR HOT/COLD WATER PIPE >>>

Junxing manufactures PPR Pipes for hot/cold water installations. Our PPR pipes are made of the highest quality PPR material, which is tested under extreme conditions & conforms to global quality standards for quality; our PPR pipes are reliable and designed to give levels of performance in the face of the harshest of elements.

Conforming to world-class standards of quality, they are extremely reliable & offer convenient & reliable installation in any plumbing system.



## Technical specification:

- Standard: GB/T18472, ISO15874, DIN 8077 8088
- Color: green, grey and white
- Length: 4m/pc or customized

Unit: mm

| Outer diameter(mm)-dn | Pipe series           |      |      |      |
|-----------------------|-----------------------|------|------|------|
|                       | S5                    | S4   | S3.2 | S2.5 |
|                       | wall thickness(mm) en |      |      |      |
| 20                    | 2.0                   | 2.3  | 2.8  | 3.4  |
| 25                    | 2.3                   | 2.8  | 3.5  | 4.2  |
| 32                    | 2.9                   | 3.6  | 4.4  | 5.4  |
| 40                    | 3.7                   | 4.5  | 5.5  | 6.7  |
| 50                    | 4.6                   | 5.6  | 6.9  | 8.3  |
| 63                    | 5.8                   | 7.1  | 8.6  | 10.5 |
| 75                    | 6.8                   | 8.4  | 10.3 | 12.5 |
| 90                    | 8.2                   | 10.1 | 12.3 | 15.0 |
| 110                   | 10.0                  | 12.3 | 15.1 | 18.3 |
| 125                   | 11.4                  | 14.0 | 17.1 | 20.8 |
| 140                   | 12.7                  | 15.7 | 19.2 | 23.3 |
| 160                   | 14.6                  | 17.9 | 21.9 | 26.6 |
| 200                   | 18.2                  | 22.2 | 27.9 | 33.3 |

## Competitive Advantages of the product:

- High Temperature Resistance: the maximum sustained working temperature is up to 70 Degrees Celsius, the maximum transient temperature is up to 95 Degrees Celsius.
- Heat Preservation: low thermal conductivity which is only 1/1500 of brass pipe, and 1/250 of steel pipe.
- Non-toxic: no heavy metal additives would not be covered with dirt or contaminated by bacterium.
- Corrosion Resistant: resist chemical matters or electron chemical corrosion.
- Lower Installation Costs: light weight.

## Applications:


- Cold and hot water supply
- Heating system including flooring heating, wall
- Heating and radiant system
- Central air conditioning system
- Industrial liquids transportation



Portable water system



Sanitary application

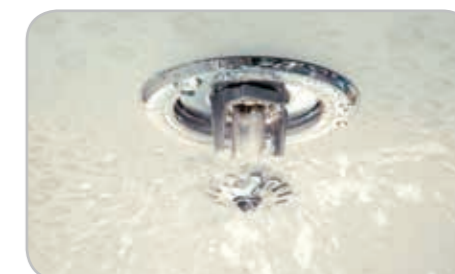

Fire protection



Air conditioning system



Heating&cooling system



Industry/other



We have a widely product range and can produce

**S5 to S2 .5**

series of global standard size of

**20mm to 200 mm.**



## PP-R FITTINGS >>>

### EQUAL COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 700               |
| 25                | 420               |
| 32                | 240               |
| 40                | 175               |
| 50                | 112               |
| 63                | 72                |
| 75                | 60                |
| 90                | 36                |
| 110               | 24                |
| 125               | 20                |
| 140               | 12                |
| 160               | 12                |
| 200               |                   |

### REDUCING COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 25*20             | 500               |
| 32*20             | 300               |
| 32*25             | 300               |
| 40*20             | 210               |
| 40*25             | 210               |
| 40*32             | 180               |
| 50*20             | 140               |
| 50*25             | 140               |
| 50*32             | 140               |
| 50*40             | 90                |
| 63*25             | 90                |
| 63*32             | 90                |
| 63*40             | 90                |
| 63*50             | 60                |
| 75*40             | 99                |
| 75*50             | 99                |
| 75*63             | 66                |
| 90*50             | 60                |
| 90*63             | 60                |
| 90*75             | 36                |
| 110*63            | 24                |
| 110*75            | 24                |
| 110*90            | 24                |
| 125*75            | 18                |
| 125*90            | 18                |
| 125*110           | 16                |
| 140*90            | 16                |
| 140*110           | 12                |
| 140*125           | 12                |
| 160*110           | 12                |
| 160*125           | 8                 |
| 160*140           | 8                 |
| 200*110           |                   |
| 200*160           |                   |



### 90° EQUAL ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 400               |
| 25                | 280               |
| 32                | 150               |
| 40                | 100               |
| 50                | 48                |
| 63                | 28                |
| 75                | 32                |
| 90                | 18                |
| 110               | 12                |
| 125               | 8                 |
| 140               | 6                 |
| 160               | 4                 |
| 200               |                   |

### 90° REDUCING ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 25*20             | 300               |
| 32*20             | 280               |
| 32*25             | 210               |
| 40*25             | 160               |
| 40*32             | 120               |
| 50*32             | 80                |
| 50*40             | 60                |
| 63*50             | 36                |

# PP-R FITTINGS >>>

## 45° EQUAL ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 500               |
| 25                | 300               |
| 32                | 150               |
| 40                | 90                |
| 50                | 60                |
| 63                | 40                |
| 75                | 40                |
| 90                | 21                |
| 110               | 12                |
| 125               | 10                |
| 140               | 6                 |
| 160               | 6                 |

## PIPE CAP



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 1120              |
| 25                | 800               |
| 32                | 420               |
| 40                | 260               |
| 50                | 150               |
| 63                | 100               |
| 75                | 100               |
| 90                | 64                |
| 110               |                   |
| 125               |                   |
| 140               |                   |
| 160               |                   |

## EQUAL TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 300               |
| 25                | 200               |
| 32                | 120               |
| 40                | 70                |
| 50                | 42                |
| 63                | 28                |
| 75                | 24                |
| 90                | 12                |
| 110               | 10                |
| 125               | 6                 |
| 140               | 4                 |
| 160               | 3                 |
| 200               |                   |

## REDUCING TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 25*20*20          | 240               |
| 32*20*25          | 150               |
| 32*25*20          | 150               |
| 32*25*25          | 120               |

## REDUCING TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 25*20             | 240               |
| 32*20             | 150               |
| 32*25             | 120               |
| 40*20             | 90                |
| 40*25             | 100               |
| 40*32             | 80                |
| 50*20             | 64                |
| 50*25             | 64                |
| 50*32             | 48                |
| 50*40             | 48                |
| 63*20             | 32                |
| 63*25             | 32                |
| 63*32             | 32                |
| 63*40             | 32                |
| 63*50             | 28                |
| 75*40             | 32                |
| 75*50             | 32                |
| 75*63             | 26                |
| 90*50             | 18                |
| 90*63             | 18                |
| 90*75             | 18                |
| 110*63            | 12                |
| 110*75            | 12                |
| 110*90            | 12                |
| 125*75            | 8                 |
| 125*90            | 6                 |
| 125*110           | 6                 |
| 140*90            | 6                 |
| 140*110           | 4                 |
| 140*125           | 4                 |
| 160*110           | 4                 |
| 160*125           | 4                 |
| 160*140           | 4                 |
| 200*110           |                   |
| 200*160           |                   |

# PP-R FITTINGS >>>

We produce PPR pipe fittings by imported material, and has a nice appearance with size from 20mm to 200mm. It is connected by Hot-fusion method, which will be convenient for the construction, ensures the easily repaired and safety of the whole pipe system.



# PP-R FITTINGS >>>

## REDUCING TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*25*20          | 240               |
| 20*32*20          | 200               |
| 25*32*25          | 120               |

## CROSS



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 240               |
| 25                | 160               |
| 32                | 90                |

## SIX-WAY FITTING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 60                |
| 25                | 40                |

## FLANGE CONNECTOR



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 40                | 150               |
| 50                | 90                |
| 63                | 70                |
| 75                | 63                |
| 90                | 54                |
| 110               | 24                |
| 125               | 18                |
| 140               | 16                |
| 160               | 18                |
| 200               |                   |

## MALE COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 170               |
| 20*3/4"           | 140               |
| 25*1/2"           | 130               |
| 25*3/4"           | 120               |
| 25*1"             | 50                |
| 32*3/4"           | 120               |
| 32*1"             | 50                |
| 40*1.1/4"         | 34                |
| 50*1.1/2"         | 28                |
| 63*2"             | 18                |

## FEMALE COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 200               |
| 20*3/4"           | 140               |
| 25*1/2"           | 140               |
| 25*3/4"           | 130               |
| 32*3/4"           | 120               |
| 32*1"             | 60                |
| 40*1.1/4"         | 36                |
| 50*1.1/2"         | 28                |
| 63*2"             | 18                |

# PP-R FITTINGS >>>



## FEMALE TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 100               |
| 25*1/2"           | 80                |
| 25*3/4"           | 60                |
| 32*1/2"           | 52                |
| 32*3/4"           | 48                |
| 32*1"             |                   |
| 40*1/2"           | 52                |
| 40*3/4"           | 48                |

## MALE TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 100               |
| 25*1/2"           | 70                |
| 25*3/4"           | 60                |

## ELBOW-PLATE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 100               |
| 20*3/4"           | 80                |
| 25*1/2"           | 80                |
| 25*3/4"           | 60                |

## FEMALE ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 120               |
| 25*1/2"           | 90                |
| 25*3/4"           | 80                |
| 32*3/4"           | 60                |
| 32*1"             | 40                |

## MALE ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 120               |
| 25*1/2"           | 90                |
| 25*3/4"           | 80                |
| 32*3/4"           | 50                |
| 32*1"             | 40                |



# PP-R FITTINGS >>>

## BRASS BALL VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 50                |
| 25                | 35                |
| 32                | 30                |
| 40                | 24                |
| 50                | 10                |
| 63                | 8                 |

## BRASS BALL VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 50                |
| 25                | 40                |
| 32                | 25                |
| 40                | 12                |
| 50                | 8                 |
| 63                | 6                 |

## FEMALE UNION



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 130               |
| 25*3/4"           | 90                |
| 32*1"             | 50                |
| 40*1.1/4"         | 45                |
| 50*1.1/2"         | 30                |
| 63*2"             | 14                |

## DOUBLE PPR HEAD UNION



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 100               |
| 25                | 70                |
| 32                | 40                |

## MALE UNION



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 120               |
| 20*3/4"           |                   |
| 25*1/2"           |                   |
| 25*3/4"           | 80                |
| 25*1"             |                   |
| 32*1"             | 45                |
| 40*1.1/4"         | 30                |
| 50*1.1/2"         | 22                |
| 63*2"             | 14                |

## MALE BALL VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 70                |
| 25*3/4"           | 50                |
| 32*1"             | 25                |

## BYPASS BEND



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 210               |
| 25                | 120               |
| 32                | 80                |

## FEMALE BALL VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 70                |
| 25*3/4"           | 50                |
| 32*1"             | 25                |

**JUNXING PP-R PIPES AND PIPE FITTINGS ARE WIDELY USED IN SUCH AREAS AS DELIVERY OF DRINKING WATER,**

PRODUCTION AND DELIVERY SYSTEM OF PURIFIED WATER AND DRINKS, TRANSPORTATION OF CHEMICAL FLUIDS, HEATING PIPES, CIRCULATION SYSTEM OF HOT WATER, ETC.

# NANO ANTI-BACTERIAL PPR PIPE >>>

Nano is the statutory measurement in the name of the measuring unit, its unit symbols is nm. 1nm equal to one thousand millionth of a meter, namely as long as 10 hydrogen atoms in straight line. When the particle size of the material is 0.1-100nm, collectively called nanophase materials.

At present the nanometer material in plastic can improve the material's barrier property, the mechanical strength, thermal deformation temperature and improve the material's low temperature resistance, at the same time, strengthened the antioxidant brittle relaxing and ultraviolet prevention ability, greatly improve the service life of the pipe.

## Applications:

- Purified water, drinking water system;
- Solar heating and cooling equipment system;
- Beverage and liquid medicine production system;
- Industrial compressed air pipe network;
- Caliduct, floor and wall heating equipment;
- Indoor and outdoor pipe of exposed installation;
- Oxygen pipe in hospital;
- Other industrial and agricultural pipe.

## Technical specification:

- Standard: Q/12WQ5066-2011
- Length: 4m or as request


Unit: mm

| Outer diameter(mm)-dn | Pipe series            |      |
|-----------------------|------------------------|------|
|                       | S4                     | S3.2 |
|                       | wall thickness (mm) en |      |
| 20                    | 2.3                    | 2.8  |
| 25                    | 2.8                    | 3.5  |
| 32                    | 3.6                    | 4.4  |
| 40                    | 4.5                    | 5.5  |
| 50                    | 5.6                    | 6.9  |
| 63                    | 7.1                    | 8.6  |
| 75                    | 8.4                    | 10.3 |



## Competitive Advantages of the product:

- Sanitary & non-toxic;
- Corrosion resistant & not scaling;
- Elegant appearance;
- Antimicrobial. The sterilization rate of escherichia coli and golden staphylococcus is over 90%;
- In long-term work water temperature during civil constructional engineering, water temperature is less than 70°C, max temperature is less than 80°C, system pressure reaches 0.8Mpa;
- Heat preservation & energy efficient. The transfer-heat coefficient of our product is only 0.5% of metallic pipe;
- Light weight. Only 1/8 of steel. Be convenient in transportation and installation;
- Apply thermal melting connection, It's easy, reliable, environmental, safe;
- Long service life. The working life is approximately 50 years under the normal pressure and temperature.

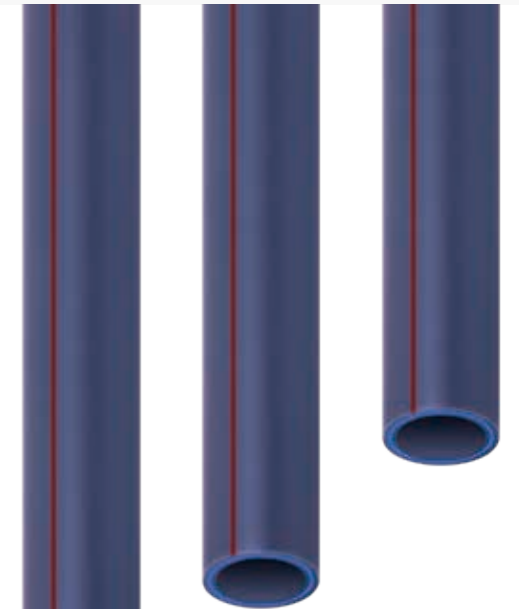

# βPP-R FITTINGS >>>

## EQUAL COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 700               |
| 25                | 420               |
| 32                | 240               |
| 40                | 175               |
| 50                | 112               |
| 63                | 72                |
| 75                | 60                |

## 90 DEGREE ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 400               |
| 25                | 280               |
| 32                | 150               |
| 40                | 100               |
| 50                | 48                |
| 63                | 28                |
| 75                | 32                |

## 45 DEGREE ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 500               |
| 25                | 300               |
| 32                | 150               |
| 40                | 90                |
| 50                | 60                |
| 63                | 40                |
| 75                | 40                |

## REDUCING COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 25*20             | 500               |
| 32*20             | 300               |
| 32*25             | 300               |
| 40*20             | 210               |
| 40*25             | 210               |
| 40*32             | 180               |
| 50*20             | 140               |
| 50*25             | 140               |
| 50*32             | 140               |
| 50*40             | 90                |
| 63*25             | 90                |
| 63*32             | 90                |
| 63*40             | 90                |
| 63*50             | 60                |
| 75*40             | 99                |
| 75*50             | 99                |
| 75*63             | 66                |

## 90 REDUCING ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 25*20             | 300               |
| 32*20             | 280               |
| 32*25             | 210               |
| 40*25             | 160               |
| 40*32             | 120               |
| 50*32             | 80                |
| 50*40             | 60                |
| 63*50             | 36                |

## EQUAL TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 300               |
| 25                | 200               |
| 32                | 120               |
| 40                | 70                |
| 50                | 42                |
| 63                | 28                |
| 75                | 24                |



# βPP-R FITTINGS >>>



## REDUCING TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 25*20             | 240               |
| 32*20             | 150               |
| 32*25             | 120               |
| 40*20             | 90                |
| 40*25             | 100               |
| 40*32             | 80                |
| 50*20             | 64                |
| 50*25             | 64                |
| 50*32             | 48                |
| 50*40             | 48                |
| 63*20             | 32                |
| 63*25             | 32                |
| 63*32             | 32                |
| 63*40             | 32                |
| 63*50             | 28                |
| 75*40             | 32                |
| 75*50             | 32                |
| 75*63             | 26                |

## REDUCING TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*25*20          | 240               |
| 20*32*20          | 200               |
| 25*32*25          | 120               |

## CROSS



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 240               |
| 25                | 160               |
| 32                | 90                |

## OVER BEND



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 210               |
| 25                | 120               |
| 32                | 80                |

## PIPE BRACKET



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 900               |
| 25                | 900               |
| 32                | 600               |

# βPP-R FITTINGS >>>

## LONG PIPE CLAMP



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 1000              |
| 25                | 900               |

## CAP



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 1120              |
| 25                | 800               |
| 32                | 420               |
| 40                | 260               |
| 50                | 150               |
| 63                | 100               |
| 75                | 100               |

## MALE THREADED TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 100               |
| 25*1/2"           | 70                |
| 25*3/4"           | 60                |

## FEMALE THREADED ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 120               |
| 25*1/2"           | 90                |
| 25*3/4"           | 80                |
| 32*3/4"           | 60                |
| 32*1"             | 40                |

## MALE THREADED ELBOW



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 120               |
| 25*1/2"           | 90                |
| 25*3/4"           | 80                |
| 32*3/4"           | 50                |
| 32*1"             | 40                |

## FEMALE THREADED TEE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 100               |
| 25*1/2"           | 80                |
| 25*3/4"           | 60                |
| 32*1/2"           | 52                |
| 32*3/4"           | 48                |
| 32*1"             |                   |
| 40*1/2"           | 52                |
| 40*3/4"           | 48                |
| 50*1.1/2"         | 28                |
| 63*2"             | 18                |

## MALE THREADED COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 170               |
| 20*3/4"           | 140               |
| 25*1/2"           | 130               |
| 25*3/4"           | 120               |
| 25*1"             | 50                |
| 32*3/4"           | 120               |
| 32*1"             | 50                |
| 40*1.1/4"         | 34                |
| 50*1.1/2"         | 28                |
| 63*2"             | 18                |

# βPP-R FITTINGS >>>

## Junxing pipe for better life!

### FEMALE THREADED COUPLING



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 200               |
| 20*3/4"           | 140               |
| 25*1/2"           | 140               |
| 25*3/4"           | 130               |
| 32*3/4"           | 120               |
| 32*1"             | 60                |
| 40*1.1/4"         | 36                |
| 50*1.1/2"         | 28                |
| 63*2"             | 18                |

### MALE THREADED UNION



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 120               |
| 20*3/4"           |                   |
| 25*1/2"           |                   |
| 25*3/4"           | 80                |
| 25*1"             |                   |
| 32*1"             | 45                |
| 40*1.1/4"         | 30                |
| 50*1.1/2"         | 22                |
| 63*2"             | 14                |



# βPP-R FITTINGS >>>

## UNION WITH BOTH END PLASTIC



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 100               |
| 25                | 70                |
| 32                | 40                |

## SINGLE MALE THREADED BRASS BALL VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 70                |
| 25*3/4"           | 50                |
| 32*1"             | 25                |

## SINGLE FEMALE THREADED BRASS BALL VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 70                |
| 25*3/4"           | 50                |
| 32*1"             | 25                |

## FEMALE THREADED UNION



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20*1/2"           | 130               |
| 25*3/4"           | 90                |
| 32*1"             | 50                |
| 40*1.1/4"         | 45                |
| 50*1.1/2"         | 30                |
| 63*2"             | 14                |

## FUSION BRASS BALL VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 50                |
| 25                | 40                |
| 32                | 25                |
| 40                | 12                |
| 50                | 8                 |
| 63                | 6                 |

## HOT FUSION BRASS STOP VALVE



| Specification(mm) | Packing (pcs/ctn) |
|-------------------|-------------------|
| 20                | 50                |
| 25                | 35                |
| 32                | 30                |
| 40                | 24                |
| 50                | 10                |
| 63                | 8                 |

